


Display Control Instruction

Welcome to use our LED Wash Zoom 36x18W RGBWA+UV Moving Head Lighting. The light uses energy-saving LED, long Product life, shockproof, dust-proof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

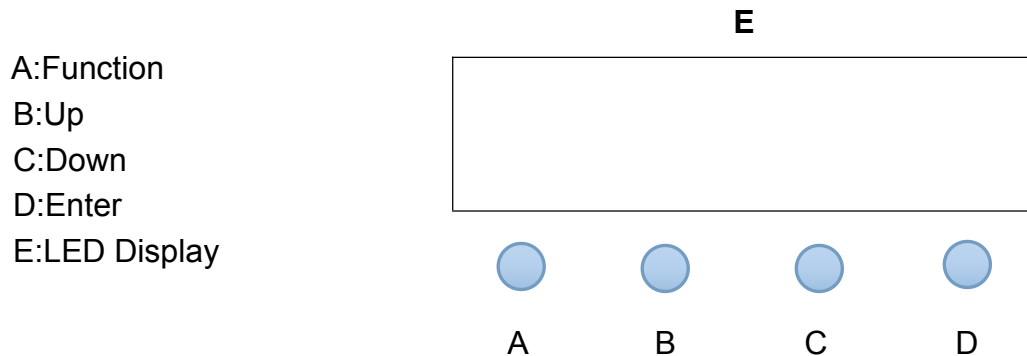

Instructions: Press the function key A cycled out the 13/19 different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Input voltage: AC90--240V, 50--60HZ
- * Power consumption: 720W
- * LED Source : 36x18W RGBWA+UV 6in1
- * DMX Control-Channels: 13/19 Channels , DMX512 3-Pin
- * Dimmer: 0-100% mechanic dimmer
- * Operational modes: DMX512, Auto Run, Sound action, Strobe, Stand Alone and Master/Slave, With Rich Advanced Built-in Programs.
- * Pan/Tilt: X axis 540 degree, Y axis 270 degree
- * Display: LED display
- * Material structure: high temperature resistant plastic
- * Long Lifespan LEDs (more than 60,000 hours)
- * Product dimension: 33.4x21.9x44.8CM
- * Product Weight: 10KG

LED Wash Zoom 36x18W RGBWA+UV Moving Head User's Manual



Please carefully read the product description before use

Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using Intermittent can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic solvent for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

Attention Item

- 1.For guarantee the life of product,please don't put it on the wet place and not use it the place over 40 degree.
- 2.Please don't lay the product on the un-fixable or shakable place.
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-13 Channels Mode(when the DMX signal is received, the last decimal point of the digital tube will blink, otherwise it will not be received.)

Channel	Function
CH1	Total Dimmer
CH2	Red Dimmer
CH3	Green Dimmer
CH4	Blue Dimmer
CH5	White Dimmer
CH6	Amber Dimmer
CH7	Ultraviolet Dimmer
CH8	X- axis Rotates
CH9	Y- axis Rotates
CH10	X/Y- axis,Speed Control
CH11	Zoom
CH12	Strobe
CH13	Blank(spare)

DMX Channel Summary-19 Channels Mode(when the DMX signal is received, the last decimal point of the digital tube will blink, otherwise it will not be received.)

Channel	Function
CH1	Total Dimmer
CH2	Red Dimmer

CH3	Green Dimmer
CH4	Blue Dimmer
CH5	White Dimmer
CH6	Amber Dimmer
CH7	Ultraviolet Dimmer
CH8	Total Brightness Control
CH9	X- axis Rotates
CH10	Y- axis Rotates
CH11	Pan Fine
CH12	Tilt Fine
CH13	X/Y-axis,Speed Control
CH14	Zoom
CH15	Strobe
CH16	Auto Mode
CH17	Speed Control-Auto Mode
CH18	Reset
CH19	Blank(spare)

Display Control Instruction

Display		Function
Address	0-512	Adjustment of DMX Channel Address
Run Mode	DMX Auto Sound Return	DMX Channel :13/19CHs Auto Mode, 1-8 Receive external sound or vibration, run built-in program effects Return
Test Mode	Pan Tilt Focus Red Green Blue White	Adjustment of Pan-Motor Adjustment of Tilt-Motor Adjustment of Zoom-Motor Red Dimmer Green Dimmer Blue Dimmer White Dimmer

	Return	Amber Dimmer Ultraviolet Dimmer Return
Language	Chinese English Return	Chinese English Return
Setup	Id Code Pan Reverse Tilt Reverse Fader Delay Signal Link Code Wheel Temp Switch Set Temperature Set Screen Saver Display Reverse Factory Set RESET Touch Correct Pan Offset Tilt Offset Return **	Adjustment of ID Code ON/OFF ON/OFF ON/OFF ON/OFF ON/OFF ON/OFF 50-120 Mode 1、 Mode 2、 OFF ON/OFF Factory Set RESET Touch Correct 0-255 0-255 Return

Homepage

System Information Interface

Option	Function
Software Version	current software version
Running Time	Cumulative usage time (accurate to minute)
Boot Time	The use of time since the start (accurate to minute)
Temperature	Lamp temperature display
Fan	Fan's working status
Return	Return to the setup interface

